

(12) UK Patent Application (19) GB (11) 2 373 813 (13) A

(43) Date of A Publication 02.10.2002

(21) Application No 0205262.9

(22) Date of Filing 06.03.2002

(30) Priority Data

(31) 60274594 (32) 10.03.2001 (33) US
(31) 10029042 (32) 19.12.2001

(71) Applicant(s)

Pomeroy Incorporated
(Incorporated in USA - Delaware)
2225 Kerper Boulevard, Dubuque, Iowa 52001,
United States of America

(72) Inventor(s)

Neeman Malek
Rex Cross

(74) Agent and/or Address for Service

Elkington and Fife
Prospect House, 8 Pembroke Road, SEVENOAKS,
Kent, TN13 1XR, United Kingdom

(51) INT CL⁷
E05D 13/00

(52) UK CL (Edition T)
E1J JFA

(56) Documents Cited
GB 2262123 A
US 2598560 A



US 5152032 A
JP 2001055861 A

(58) Field of Search
UK CL (Edition T) E1J JFA
INT CL⁷ E05D 13/00 15/18 15/22 , E05F 1/16
Online: WPI, EPODOC, JAPIO

(54) Abstract Title

Window balance

(57) A window balance comprises a threaded follower 104 mounted on a spiral rod 108, a torsion spring 100 having a first end and a second end, the spring 100 having its first end attached to the threaded follower 104 and its second end attached to a window sash, wherein attachment means 154 for attaching the spiral rod 108 to a window frame comprises means for rotating the spiral rod 108, the rotation causing a change in lifting force stored in the torsion spring 100. The means for rotating the spiral rod 108 may comprise a first 170 and second gear 150, the first gear 170 axially connected to the spiral rod 108 and the second gear 150 rotationally engaged to the first gear 170. There may be a keyed insert 140 in the second gear 150 that can be rotated to rotate the second gear 150. A tension spring 80 may additionally act on the sash.

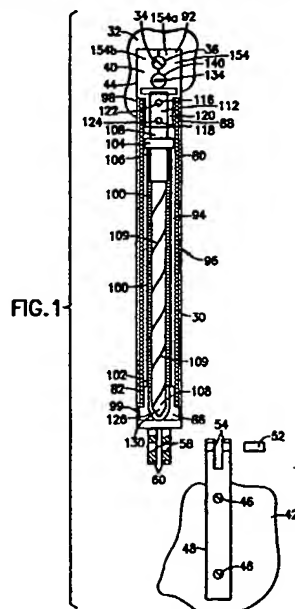

GB 2 373 813 A



FIG. 2


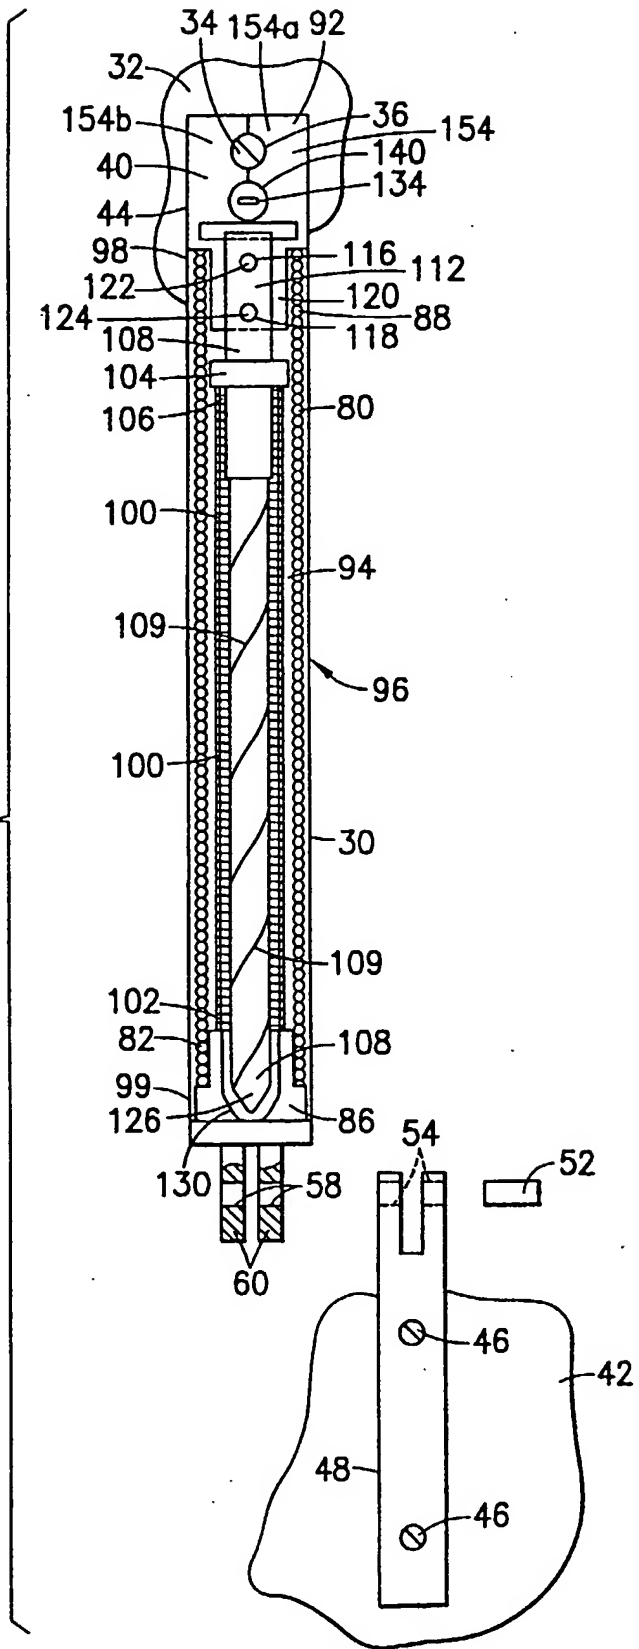


FIG. 3

FIG. 1



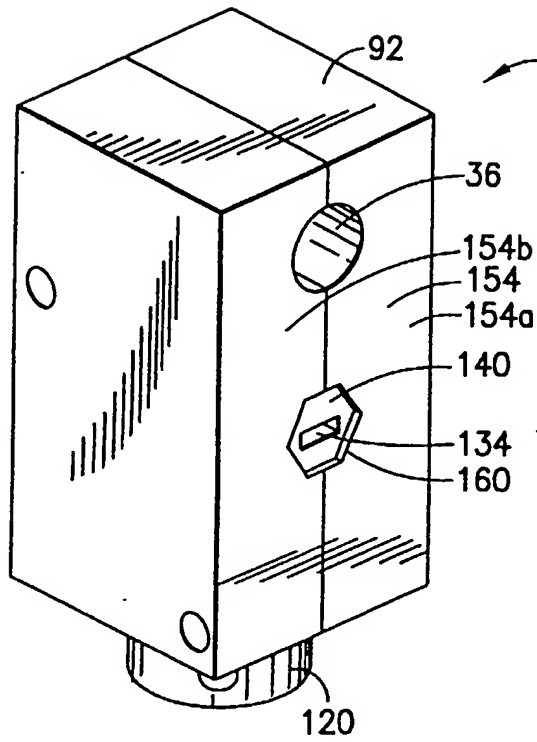


FIG. 4

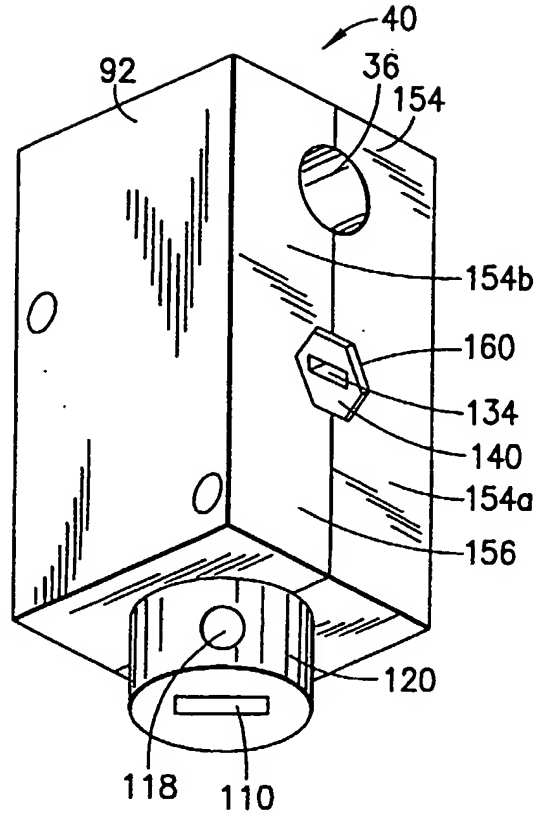


FIG. 5

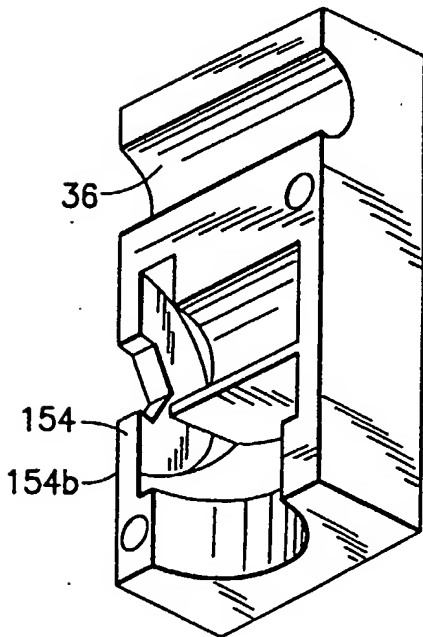


FIG. 6

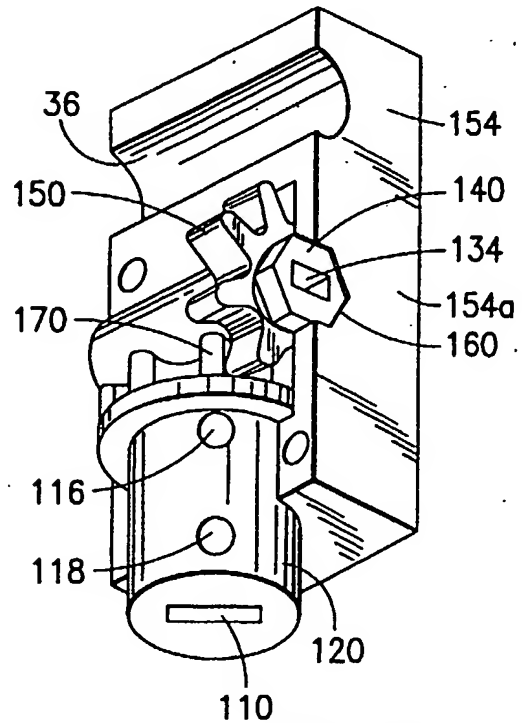


FIG. 7

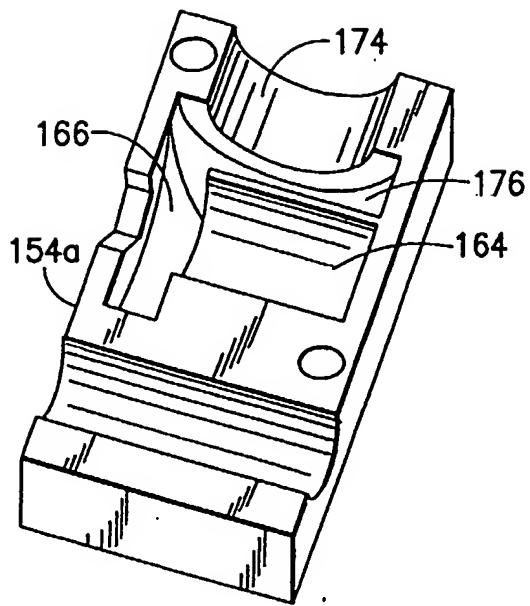


FIG. 8

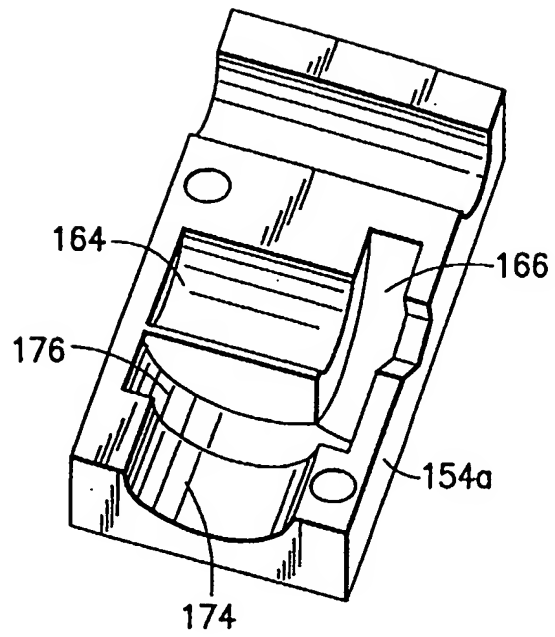


FIG. 9

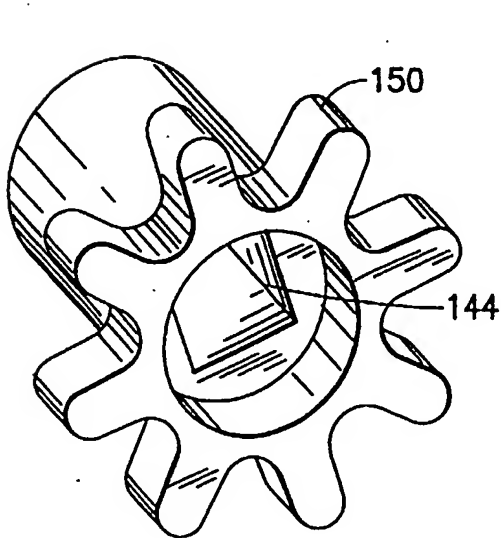


FIG. 10

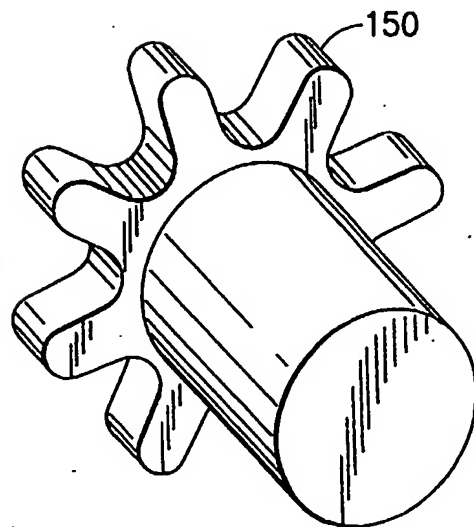


FIG. 11

4/5

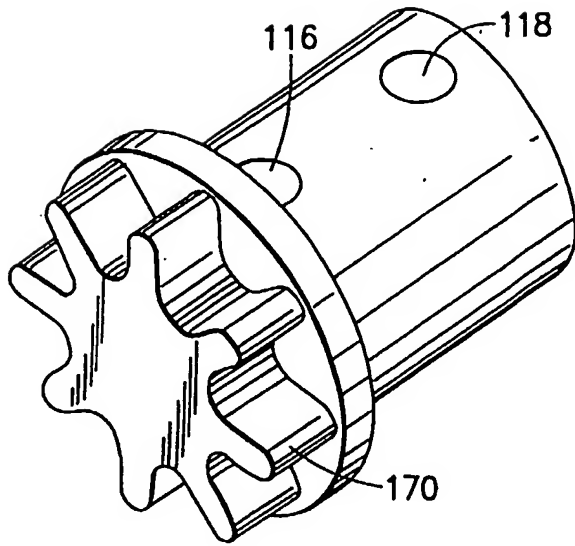


FIG. 12

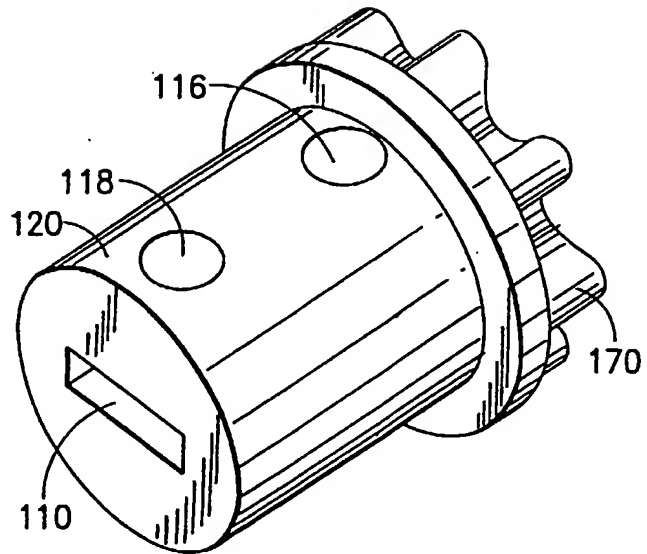


FIG. 13


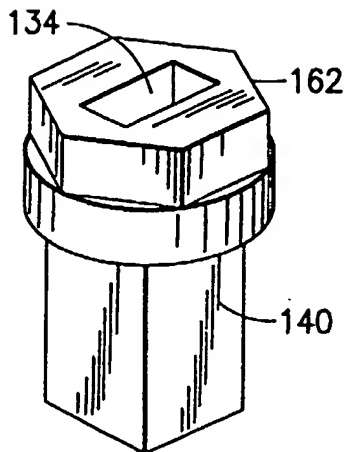


FIG. 14

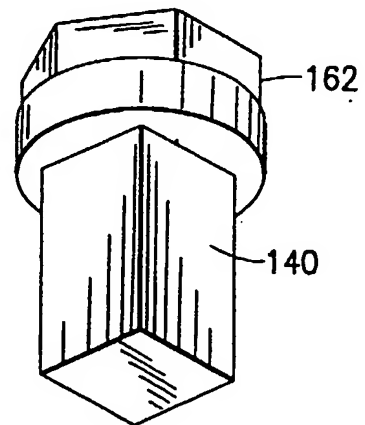


FIG. 15

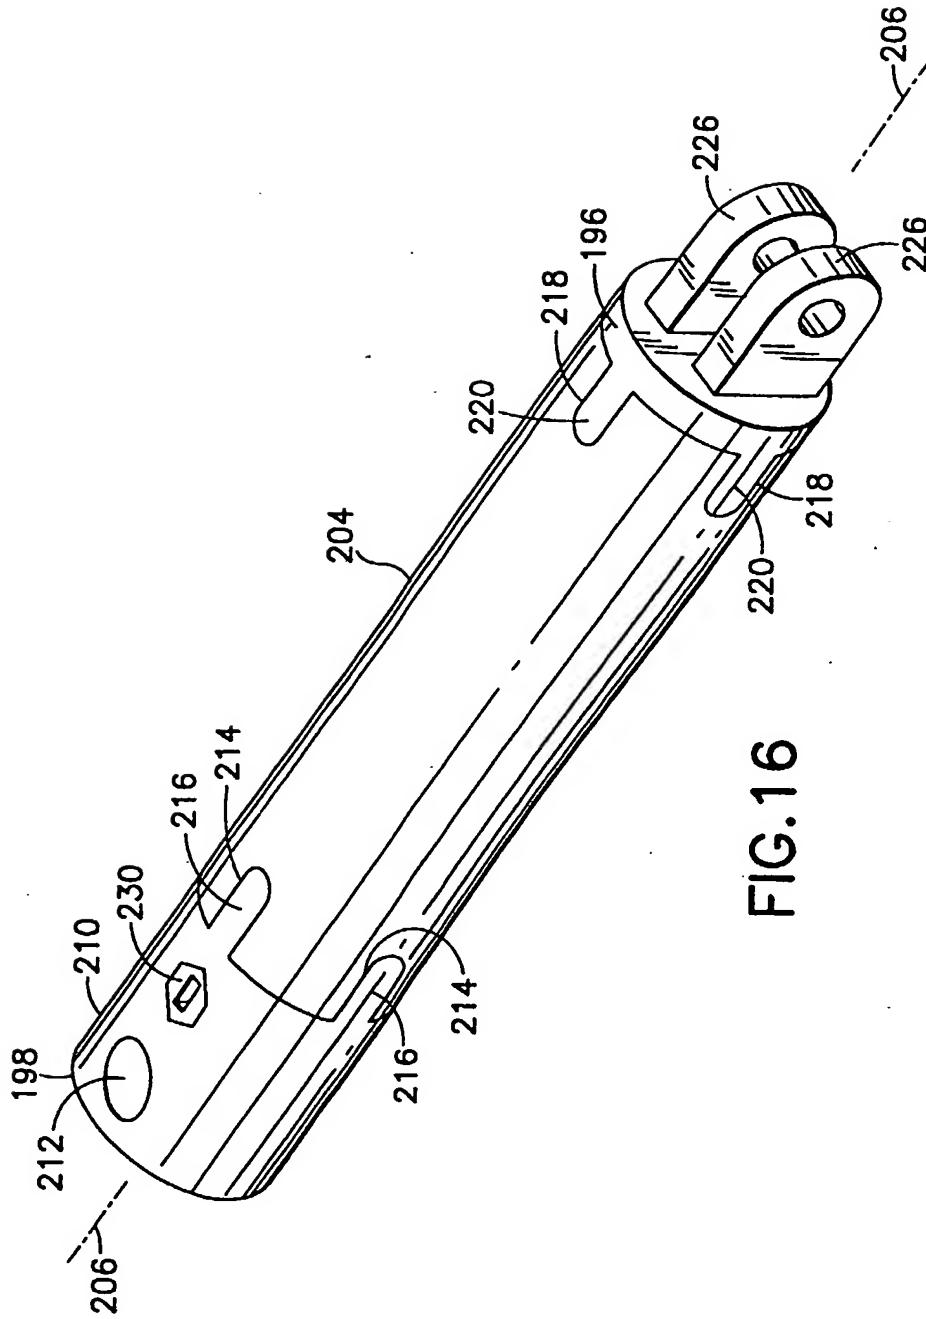


FIG. 16

WINDOW BALANCE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to window balances, more specifically to preloading of a window balance that comprises a torsion spring and a tension spring.

2. Description of the Prior Art

U.S. Patent No. 5,152,032 patented October 6, 1992 by Davis et al. describes a tension plus torsion balance. In this tension plus torsion balance the torsion spring is turned at one end of the spring by a follower. The follower is rotated by a spiral rod that is threadably engaged with the follower so that moving the spiral rod longitudinally through the follower rotates the follower. The spiral rod is moved longitudinally by a window sash as the sash is lifted and lowered, by a first eyelet at one end of the rod that is attached to the window sash.

In order to provide a predetermined baseline lifting force to be transmitted back to the sash, the torsion spring is preloaded by gripping a second eyelet adjacent to the first eyelet when the first eyelet is not attached to the sash, and twisting the rod until the desired force is obtained, then while holding the rod at that rotational position, attaching the rod to the sash by the first eyelet. U.S. Patent No. 5,152,032 is hereby incorporated by reference.

In M. H. Gregg et al. , U.S. Patent No. 2,890,480 patented June 16, 1959 the sash is lifted and the preload adjustment is made by moving a first driver of a dog-tooth clutch that is in axial alignment with the spiral rod, past a lock pin and into the second driver of the dog tooth that is attached to the end of the spiral rod, and turning the first driver.

In Larson et al., U.S. Patent No. 2,825,089 patented March 4, 1958 a slotted head for a screw driver is mounted in axial alignment on the end of the spiral rod. The head is journaled in a laterally oriented slot, pulled to one end of the slot against a ratchet pawl by a convolute spring. Increase in minimum lifting force is made by turning the screw as the pawl enters successive notches around the head. Decrease in minimum lifting force is made by moving the head laterally in the slot against the urging of the convolute spring until the notched periphery of the screw head is drawn away from the pawl, and reversing the direction of the screw.

SUMMARY OF THE INVENTION

It is one object of the invention to provide a window balance that can be preloaded while the balance is attached to a window sash and window frame.

It is another object of the invention that the window balance is preloaded by turning a gear.

Other objects and advantages of the invention will become apparent to persons skilled in the art from the ensuing description.

A window balance includes a torsion spring having a first end and a second end, a spiral rod having a first end and a second end, a threaded follower mounted on the spiral rod for being rotated by the spiral rod when the follower is moved along the spiral rod between the first end and the second end of the spiral rod. The threaded follower is attached to the first end of the

torsion spring for rotating the first end of the torsion spring by rotation of the follower.

The window balance also includes first means for attaching the second end of the torsion spring to a window sash for moving the follower along the spiral rod by moving the sash, second means for attaching the first end of the spiral rod to a window frame against rotation of the spiral rod. The second means for attaching includes means for rotating the spiral rod for changing base force in the torsion spring.

The window balance also includes a tension spring having a first end connected to the first means for attaching, and having a second end connected to the second means for attaching, and means for longitudinal engagement for prevention of differential rotational movement, connected to the first means for attaching and to the second means for attaching, for prevention of differential rotational movement between the first end of the tension spring and the second end of the tension spring when the first means for attachment is moved between a first distance and a second distance from the second means for attachment.

A window balance includes a torsion spring having a first end and a second end, a spiral rod having a first end and a second end, a threaded follower mounted on the spiral rod for being rotated by the spiral rod when the follower is moved along the spiral rod between the first end and the second end of the spiral rod, the threaded follower being attached to the first end of the torsion spring for rotating the first end of the torsion spring by rotation of the follower, first means for attaching the second end of the torsion spring to a window sash for moving the follower along the spiral rod by moving the sash, a gear bearing comprising means for attaching the gear bearing to a window frame against rotation of the gear bearing, a first gear, mounted in the gear bearing, connected to the spiral rod for rotating the spiral rod, second means for receiving external rotational force, mounted on the first gear, keyed to the first gear for rotating the first gear, means for urging the second means from a first position on the first gear to a second position on the first gear, and means mounted on the bearing configured for contacting

the second means for preventing rotation of the second means when the second means is in the second position.

A window balance includes a window frame, a window sash movably mounted on the window frame, a torsion spring having a first end and a second end, a spiral rod having a first end and a second end, a threaded follower mounted on the spiral rod for being rotated by the spiral rod when the follower is moved along the spiral rod between the first end and the second end of the spiral rod, the threaded follower being attached to the first end of the torsion spring for rotating the first end of the torsion spring by rotation of the follower, the second end of the torsion spring being mounted on the window sash for moving the follower along the spiral rod by moving the sash, a bearing housing attached to the window frame, a first gear mounted in the housing, axially connected to the spiral rod for rotating the spiral rod, a second gear rotationally engaged with the first gear for rotating the first gear, a keyed hole in the second gear, an insert in the keyed hole, keyed to the hole so that insert rotates the second gear when the insert is rotated, means for urging the insert from a first position on the second gear to a second position on the second gear, and means on the housing contacting the insert for preventing rotation of the insert when the insert is in the second position.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the invention will be more fully comprehended, it will now be described, by way of example, with reference to the accompanying drawings, in which:

Fig. 1 is a schematic cross section view of a balance of the invention including a bracket for attaching the balance to a sash.

Fig. 2 is a side view of the bracket of Fig. 1

Fig. 3 is a side view of another bracket for attaching the balance to a window sash by way of a balance shoe.

Fig. 4 is a perspective front view of a gearbox of the invention taken from above.

Fig. 5 is a perspective front view of the gearbox of Fig. 4 taken from below.

Fig. 6 is a perspective view of a first half of the split housing of the gearbox of Fig. 5 taken from below.

Fig. 7 is a perspective view of the second half of the split housing of the gearbox of Fig. 5 taken from below, containing the geartrain, the first and second sides of the split housing being mirror images of each other.

Fig. 8 is a perspective rotated view of one half of the gearbox of Fig. 5 taken from below.

Fig. 9 is a perspective rotated view of one half of the gearbox of Fig. 5 taken from below.

Fig. 10 is a perspective front view of a first gear of the gearbox of Fig. 7.

Fig. 11 is a perspective rotated view of the first gear of Fig. 10.

Fig. 12 is a perspective view of a second gear of the gearbox of Fig. 7.

Fig. 13 is a perspective rotated view of the second gear of Fig. 12.

Fig. 14 is a perspective view of an insert of the gearbox of Fig. 7, taken from above,

including a spring that is installed in the second gear with the insert.

Fig. 15 is a perspective view of the insert of Fig. 14, taken from below, without the spring.

Fig. 16 is a perspective view of another balance of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Before explaining the invention in detail, it is to be understood that the invention is not limited in its application to the detail of construction and arrangement of parts illustrated in the drawings since the invention is capable of other embodiments and of being practiced or carried out in various ways. It is also to be understood that the phraseology or terminology employed is for the purpose of description only and not of limitation.

Referring to Figs. 1-5, tension plus torsion balance 30 is attached to the upper part of stile or window frame 32 by screw 34 which passes through hole 36 in housing 92 of gearbox 40 at top 44 of the balance.

Balance 30 is attached to sash 42 by screws 46 through bracket 48 which is attached by pin 52 through holes 54 in the bracket and holes 58 in lugs 60 at the bottom of balance 30.

Balance 30 may be attached to a sash by way of one of the many shoes commercially available for attaching a balance to a sash. For this, metal strip 66 instead of bracket 48 is attached to lugs 60 by pin 52 through hole 74 in the strip and holes 58 in lugs 60. Studs 68, 70 are provided on the strip for engaging a shoe.

Extension or tension spring 80 is fixedly attached at lower end 82 of the spring to block 86 which is fixedly attached to lugs 60. The spring is fixedly attached at upper end 88 of the

spring to the housing 92 of gearbox 40

Tube 96 is fixedly attached at end 98 of the tube to housing 92 of gearbox 40. The other end, 99, of the tube is unattached. Tube 96 covers spring 80 insofar as spring 80 is not extended. When spring 80 is extended or stretched by sash drawing block 86 downward, a portion of the lower end of the stretched spring past the free lower end of the tube is not covered by the tube.

Torsion spring 100 is fixedly attached at lower end 102 of the spring to block 86, and is fixedly attached at top end 106 of the spring to internally threaded follower 104 which is rotated by the treads 109 of threaded spiral rod 108.

Tube 94 separates spring 80 from spring 100 to prevent one rubbing against the other.

Spiral rod 108 is shown in Fig. 1.

Upper end 112 of spiral rod 108 is fixedly attached by pins 122, 124 in holes 116, 118 of slotted shaft 120 of gearbox 40. Spiral rod 108 extends from slot 110 in shaft 120. Lower end 126 of spiral rod 108 is not restricted from rotating. In Fig. 1, lower end 126 is shown removably extending into recess 130 of block 86, but when the block is drawn down, away from screw 34, end 126 is left depending downward above and outside of recess 130.

As block 86 is moved downward and upward by a window sash, the block moves torsion spring 100 upwards and downward. Since the upper end of spring 100 is attached to follower 104, spring 100 moves follower 104 upward and downward along threaded spiral rod 108.

The follower, rotated by the threads of rod 108 as the follower moves up and down the rod, rotates top end 106 of torsion spring 100. Rotation of torsion spring 100 as the sash is

lowered, stores twisting force in the torsion spring that is translated into lifting force upon the torsion spring by the follower, and upon lugs 60 by the torsion spring, as the twisting force urges the follower to wind its way up the thread of the spiral rod.

In order to provide a minimum lifting force, herein called a "base force", other than the lifting force stored in spring 100 by lowering a sash to wind the spring, a screw driver is inserted into tool hole 134 in keyed insert 140 and is turned. Insert 140 is set into keyed hole 144 in gear 150, urged outward of the keyed hole by spring 152, but prevented from exiting the keyed hole by wall 154 comprising wall portions 154a, 154b, of the halves of gearbox 40 housing 92.

Hexagonal opening 160 of wall 154, comprising wall portions 154a, 154b, engages hexagonal head 162 of insert 140 preventing rotation of gear 150 unless the head and insert is pushed behind wall 154 by pushing inward on the screw driver.

Gear 150 rotationally engages gear 170 which turns shaft 120.

Preferably when gear 150 is turned to add base force, block 86 is restrained from turning relative to housing 92 of gear box 40 by means other than that of the resistance to twist of tension spring 80. Attaching the balance to a window frame and window sash provides a restraint that prevents turning of block 86.

Thus, base force can be added, increased, or reduced while the balance is attached to the window frame and sash. This is an advantage over balances that require disconnection from the sash or window frame in order to add or change the base force in a torsion spring and follower assembly.

Gear 150 turns in bearing liner halves 164 and gear tooth clearance slot halves 166.

Gear 170 turns in bearing liner halves 174 and gear tooth clearance slot halves 176.

In Fig. 16, block 196 of tension plus torsion balance 198 is prevented by tube 204 from rotating on axis 206 relative to gearbox housing 210 by longitudinal engagements of finger, groove 216, 214 and groove, finger 218, 220.

Longitudinal grooves 214 receive longitudinal fingers 216. Longitudinal grooves 218 receive longitudinal fingers 220. Thus, when gearbox housing 210 is fixed to a window frame by a screw through hole 212, block 196 cannot rotate on axis 206 relative to the frame or to gearbox housing 210, even when lugs 226 are not connected to a sash against rotation and when block 196 is moved axially away from gearbox housing 210, so long as at least one finger and groove 214, 216 and at least one finger and groove 218, 220 are engaged at each end of the balance.

The longitudinal engagements are not limited to finger and groove, but can be finger and slot, pin and hole or other longitudinal arrangement that stays in longitudinal alignment when block 196 is moved away from gear housing 210. Base force in balance 198 can be adjusted by winding the spiral rod (not shown) by pushing in and turning insert 230 even when the gearbox housing is attached to a window frame while lugs 226 are left free, not attached to a sash.

The longitudinal engagement can be between one end only of the tube and either one of the gearbox and the block, the other end of the tube being fixedly attached to or extending from the other of the gearbox and the block.

Although the present invention has been described with respect to details of certain embodiments thereof, it is not intended that such details be limitations upon the scope of the invention. It will be obvious to those skilled in the art that various modifications and substitutions may be made without departing from the spirit and scope of the invention as set forth in the following claims.

Drawing designators (informal list)

- 30 balance
- 32 window frame
- 34 screw
- 36 hole in gearbox 40
- 40 gearbox
- 42 sash
- 44 top of balance
- 46 screw
- 48 bracket
- 52 pin
- 54 hole in bracket 48
- 58 hole in lug 60
- 60 lug
- 66 metal strip
- 68 stud
- 70 stud
- 74 hole in strip 66
- 80 tension spring
- 82 lower end of spring 80
- 86 block
- 88 upper end of spring 80
- 92 housing of gearbox 40
- 94 tube between springs 100 and 108
- 96 tube around spring 80
- 98 end of tube 96
- 99 end of tube 96
- 100 torsion spring

102 lower end of spring 100
104 follower, internally threaded
106 top end of spring 100
108 spiral rod
109 thread, spiral rod
110 slot in shaft 120
112 upper end of spiral rod 108
116 hole in shaft 120
118 hole in shaft 120
120 shaft
122 pin
124 pin
126 lower end of rod 108
130 recess of block 86
134 tool hole in insert 140
140 keyed insert
144 keyed hole in gear 150
150 gear
152 spring
154 wall of housing 92
154a portion of wall 154
154b portion of wall 154
160 opening, hexagonal, of wall 154
162 hexagonal head
164 bearing liner halve
166 gear tooth clearance slot halve
170 gear
174 bearing liner halve
176 gear tooth clearance slot halve

196 block
198 balance
204 tube
206 axis
210 housing, gearbox
214 groove of longitudinal engagement
216 finger of longitudinal engagement
218 groove of longitudinal engagement
220 finger of longitudinal engagement
212 hole
226 lug
230 insert

CLAIMS

1. A window balance comprising:

a torsion spring having a first end and a second end,

a spiral rod having a first end and a second end,

a threaded follower mounted on said spiral rod for being rotated by said spiral rod when said follower is moved along said spiral rod between the first end and the second end of said spiral rod,

said threaded follower being attached to the first end of said torsion spring for rotating the first end of said torsion spring by rotation of said follower,

first means for attaching the second end of said torsion spring to a window sash for moving said follower along said spiral rod by moving the sash,

second means for attaching the first end of said spiral rod to a window frame against rotation of said spiral rod,

said second means for attaching comprising means for rotating said spiral rod for changing base force in said torsion spring.

2. The window balance of claim 1 further comprising:

said means for rotating said spiral rod comprising a first gear connected to said spiral rod for rotating said spiral rod.

3. The window balance of claim 2, further comprising:

third means for receiving external rotational force, mounted on said first gear, keyed to said first gear for rotating said first gear.

4. The window balance of claim 3, further comprising:

means for locking said third means against rotation.

5. The window balance of claim 2, further comprising:

a second gear axially connected to said spiral rod for rotating said spiral rod, rotationally engaged with said first gear for being rotated by said first gear.

6. The window balance of claim 5 wherein said first gear has an axis that is normal to the axis of said second gear.

7. A window balance comprising:

a torsion spring having a first end and a second end,

a spiral rod having a first end and a second end,

a threaded follower mounted on said spiral rod for being rotated by said spiral rod when said follower is moved along said spiral rod between the first end and the second end of said spiral

rod,

said threaded follower being attached to the first end of said torsion spring for rotating the first end of said torsion spring by rotation of said follower,

first means for attaching the second end of said torsion spring to a window sash for moving said follower along said spiral rod by moving the sash,

second means for attaching the first end of said spiral rod to a window frame against rotation of said spiral rod,

said second means for attaching comprising means for rotating said spiral rod for changing base force in said torsion spring,

a tension spring having a first end connected to said first means for attaching, and having a second end connected to said second means for attaching, and

means for longitudinal engagement for prevention of differential rotational movement, connected to said first means for attaching and to said second means for attaching, for prevention of differential rotational movement between the first end of said tension spring and the second end of said tension spring when said first means for attachment is moved between a first distance and a second distance from said second means for attachment.

8. A window balance comprising:

a torsion spring having a first end and a second end,

a spiral rod having a first end and a second end,

a threaded follower mounted on said spiral rod for being rotated by said spiral rod when said follower is moved along said spiral rod between the first end and the second end of said spiral rod,

said threaded follower being attached to the first end of said torsion spring for rotating the first end of said torsion spring by rotation of said follower,

first means for attaching the second end of said torsion spring to a window sash for moving said follower along said spiral rod by moving the sash,

a gear bearing comprising means for attaching said gear bearing to a window frame against rotation of said gear bearing,

a first gear, mounted in said gear bearing, connected to said spiral rod for rotating said spiral rod,

second means for receiving external rotational force, mounted on said first gear, keyed to said first gear for rotating said first gear,

means for urging said second means from a first position on said first gear to a second position on said first gear,

means mounted on said bearing configured for contacting said second means for preventing rotation of said second means when said second means is in said second position.

9. A window balance comprising:

a window frame,

a window sash movably mounted in said window frame,

a gear bearing mounted on said window frame against rotation of said gear bearing,

a torsion spring having a first end and a second end,

a first gear, mounted in said gear bearing, connected to the first end of a spiral rod for rotating said spiral rod,

a threaded follower mounted on said spiral rod for being rotated by said spiral rod when said follower is moved along said spiral rod,

said threaded follower being attached to the first end of said torsion spring for rotating the first end of said torsion spring by rotation of said follower,

the second end of said torsion spring being mounted on said sash against rotation of said second end of said torsion spring, for moving said follower along said spiral rod by moving said sash.

10. A window balance comprising:

a window frame,

a window sash movably mounted in said window frame,

a gear bearing mounted on said window frame against rotation of said gear bearing,

a torsion spring having a first end and a second end,

a first gear, mounted in said gear bearing, connected to the first end of a spiral rod for rotating said spiral rod,

a threaded follower mounted on said spiral rod for being rotated by said spiral rod when said follower is moved along said spiral rod,

said threaded follower being attached to the first end of said torsion spring for rotating the first end of said torsion spring by rotation of said follower,

the second end of said torsion spring being mounted on said sash for moving said follower along said spiral rod by moving said sash,

means for longitudinal engagement connected to said gear bearing and to said second end of said torsion spring, configured for prevention of differential rotational movement between said gear bearing and said second end of said torsion spring when said second end of said torsion spring is moved between a first distance and a second distance from said gear bearing.

11. A window balance comprising:

a torsion spring having a first end and a second end,

a spiral rod having a first end and a second end,

a threaded follower mounted on said spiral rod for being rotated by said spiral rod when said follower is moved along said spiral rod between the first end and the second end of said spiral rod,

said threaded follower being attached to the first end of said torsion spring for rotating the first

end of said torsion spring by rotation of said follower,

first means for attaching the second end of said torsion spring to a window sash for moving said follower along said spiral rod by moving the sash,

a bearing housing comprising means for attaching said bearing housing to a window frame,

a first gear mounted in said housing, axially connected to said spiral rod for rotating said spiral rod,

a second gear rotationally engaged with said first gear for rotating said first gear,

a keyed hole in said second gear,

an insert in said keyed hole, keyed to said hole so that insert rotates said second gear when said insert is rotated,

means for urging said insert from a first position on said second gear to a second position on said second gear,

means on said housing contacting said insert for preventing rotation of said insert when said insert is in said second position.

12. A window balance comprising:

a window frame,

a window sash movably mounted on said window frame,

a torsion spring having a first end and a second end,

a spiral rod having a first end and a second end,

a threaded follower mounted on said spiral rod for being rotated by said spiral rod when said follower is moved along said spiral rod between the first end and the second end of said spiral rod,

said threaded follower being attached to the first end of said torsion spring for rotating the first end of said torsion spring by rotation of said follower,

the second end of said torsion spring being mounted on said window sash for moving said follower along said spiral rod by moving the sash,

a bearing housing attached to said window frame,

a first gear mounted in said housing, axially connected to said spiral rod for rotating said spiral rod,

a second gear rotationally engaged with said first gear for rotating said first gear,

a keyed hole in said second gear,

an insert in said keyed hole, keyed to said hole so that insert rotates said second gear when said insert is rotated,

means for urging said insert from a first position on said second gear to a second position on said second gear,

means on said housing contacting said insert for preventing rotation of said insert when said insert is in said second position.



INVESTOR IN PEOPLE

Application No: GB 0205262.9
Claims searched: 1-12

Examiner: Ben Widdows
Date of search: 22 July 2002

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.T): E1J JFA

Int Cl (Ed.7): E05D 13/00 15/18 15/22
E05F 1/16

Other: Online: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2262123 A (NAKANISHI ENGINEERING) see fig 3 and abstract	1
X	US 5152032 A (CALDWELL MFG CO) see fig 1 and abstract	1
X	US 2598560 A (MECHANO GEAR SHIFT COMPANY) see figs 1&4	1
X	JP 2001055861 A (MEIKO KK) see figs 2&5	at least 1

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.